


KENGold™ | The Gold Standard in
Coating Technology

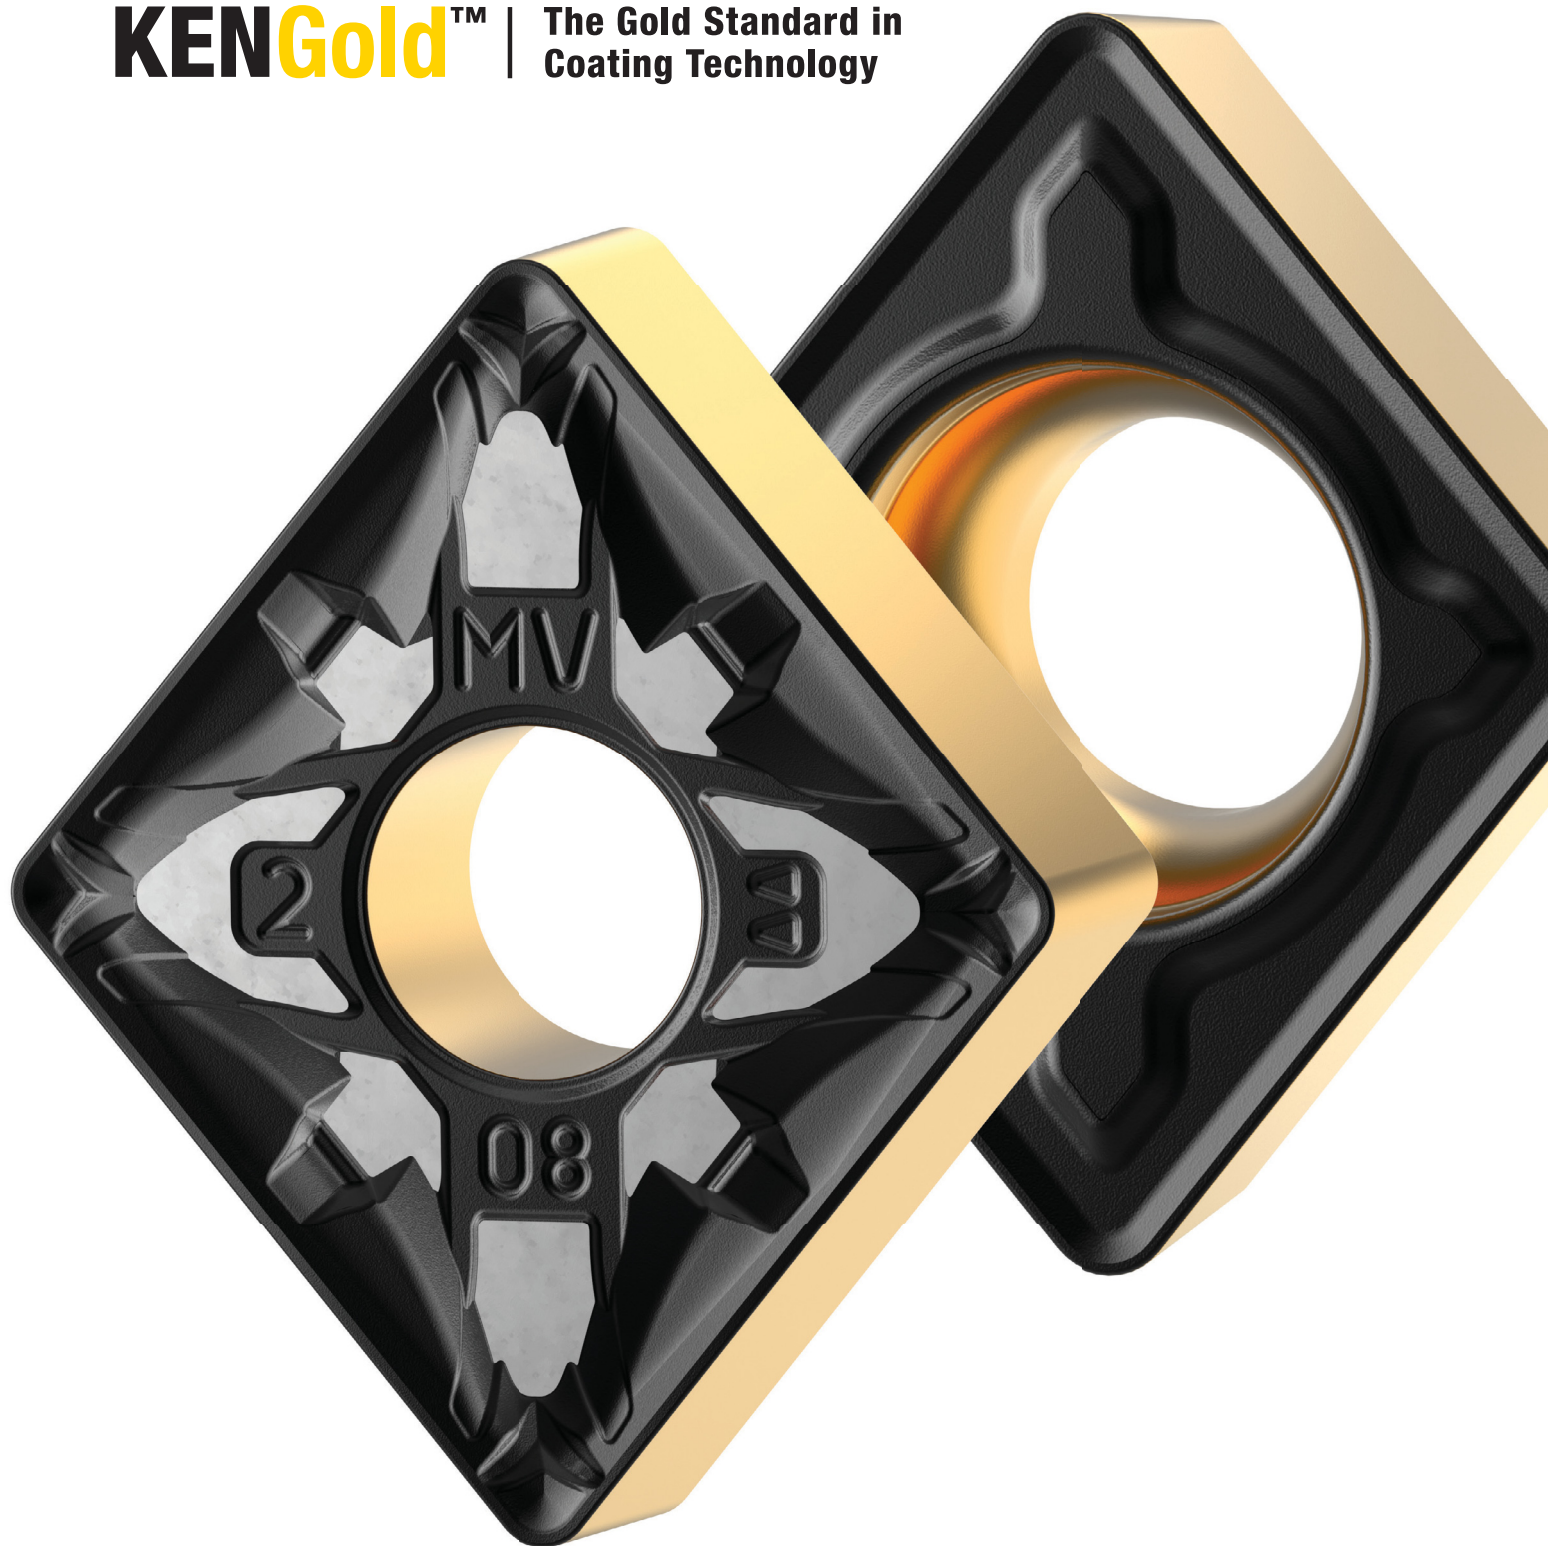

INNOVATIONS 2024 | METRIC

NEW COATING TECHNOLOGY FOR TURNING APPLICATIONS

KENGold™

ISO Turning



KENGold KCP25C Grade protects against flank wear.

KENGold KCP25C Grade offers easy identification of worn and/or unused edges.

KENGold KCP25C Grade resists wear and provides a strong thermal barrier.

KENGold KCP25C Grade increases output rate reliability and has consistent tool life.

INNOVATIONS

Services & Support2-5

 Contact Information.....2-3

 Online Catalog • NOVO.....4-5

ISO Turning6-28

 Catalog Numbering System • Inserts.....8-9

 Catalog Numbering System • Grades10

 Turning Technical Tips11

 Selection Guide12-13

 Chip Control Geometries Overview14

 Negative Inserts15-25

 Positive Inserts.....26-28

General Information.....29-31

 Grades and Grade Descriptions29

 Key to Column Headings30

 Material Cross Reference31

CAS — Customer Application Support

Get Fast and Reliable Answers to Your Toughest Problems

Our CAS Team is the metalworking industry's leading help desk resource for tooling application solutions and problem resolution.

Easy Access to Proven Metalworking Expertise!

Kennametal Application Engineers assist customers and engineering groups throughout the world with expert tool selection and application recommendations for the entire range of Kennametal tooling.



Region	Originating Country	Language	CAS Hotline	Email
North America	USA	English	800 835 3668	na.techsupport@kennametal.com
	Mexico	Spanish	1800 253 0758	na.techsupport@kennametal.com
Africa	South Africa	English	+27117489300	na.techsupport@kennametal.com
Europe	Austria	German	0223 63181360	eu.techsupport@kennametal.com
	Belgium	English/French	0279 06 540	eu.techsupport@kennametal.com
	Denmark	English	808 89298	na.techsupport@kennametal.com
	Finland	English	0800 919412	na.techsupport@kennametal.com
	France	French	01 60 12 83 00	eu.techsupport@kennametal.com
	Germany	German	06003 8277110	eu.techsupport@kennametal.com
	Israel	English	—	na.techsupport@kennametal.com
	Italy	Italian	028 95 96 212	eu.techsupport@kennametal.com
	Netherlands	English	076 79 95 220	eu.techsupport@kennametal.com
	Norway	English	800 10080	na.techsupport@kennametal.com
	Poland	Polish	616 656 553	eu.techsupport@kennametal.com
	Russia	English	—	eu.techsupport@kennametal.com
	Sweden	English	0207 99246	na.techsupport@kennametal.com
	UK	English	0138 44 08 095	na.techsupport@kennametal.com
	Ukraine	English	—	eu.techsupport@kennametal.com
Asia Pacific	Australia	English	1800 666 667	ap-kmt.techsupport@kennametal.com
	India	English	1 800 103 5227	in.techsupport@kennametal.com
	Japan	English	03 3820 2855	ap-kmt.techsupport@kennametal.com
	Korea (South)	English	+82 2 2100 6100	ap-kmt.techsupport@kennametal.com
	Malaysia	English	1800 812 990	ap-kmt.techsupport@kennametal.com
	New Zealand	English	0800 450 941	ap-kmt.techsupport@kennametal.com
	Singapore	English	1800 6221031	ap-kmt.techsupport@kennametal.com
	Taiwan	English	0800 666 197	ap-kmt.techsupport@kennametal.com
	Thailand	English	1800 4417820	ap-kmt.techsupport@kennametal.com

Numbers shown only serve the originating country listed.

Service & Sales Centers Around the World

Region	Country	Sales Hotline	Email
North America	United States	+1 800 446 7738	FtMill.Service@kennametal.com
	Canada	+1 800 446 7738	toronto.service@kennametal.com
	Mexico	+1 888 402 4963	k-mx.service@kennametal.com
Central/South America	Argentina	+54 11 4719 0700	buenos-aires.ventas@kennametal.com
	Brazil	+55 19 3936 9200	bra.marketing@kennametal.com
	Chile	+56 2 2264 1177	kennametalchile@kennametalchile.cl
Africa	Egypt	+44 1384 408060	na.techsupport@kennametal.com
	South Africa	+27 11 748 9300	na.techsupport@kennametal.com
Europe	Austria	+43 2236 3798980	brunn.sales@kennametal.com
	Belgium	+32 0800 81 372	belgium.sales@kennametal.com
	Czech Republic	+420 800 900 840	k-prha.sales@kennametal.com
	France	+33 1 60 12 81 00	info.fr@kennametal.com
	Germany	+49 6003 8277 0	rosbach.sales@kennametal.com
	Great Britain	+44 1384 408060	kingswinford.service@kennametal.com
	Hungary	+36 96 618 150	gyoer.sales@kennametal.com
	Ireland	+44 1384 408060	na.techsupport@kennametal.com
	Italy	+39 02 895 961	milano.vendite@kennametal.com
	Luxemborg	+32 4 248 48 48	liege.sales@kennametal.com
	Netherlands	+31 0800 44 33 201	netherlands.sales@kennametal.com
	Poland	+48 61 6656501	poland.service@kennametal.com
	Portugal	+351 22 4119 400	porto.service@kennametal.com
	Russia	+7 495 4115386	moscow.information@kennametal.com
	Slovakia	+421 0800 044 053	k-eu-zilina.sales@kennametal.com
Asia Pacific	Spain	+34 93 586 03 50	barcelona.service@kennametal.com
	Turkey	+90 216 574 4780	tr.information@kennametal.com
	Australia	+61 800 666 667	k-au.service@kennametal.com
	China	+86 400 889 2135	k-cn.service@kennametal.com
	India	+91 800 103 5138	k-bngl.information@kennametal.com
	Indonesia	+65 6265 9222	k-sg.sales@kennametal.com
	Japan	+81 3 3820 2855	k-jp.service@kennametal.com
	Korea (South)	+82 2 2109 6100	k-kr-service@kennametal.com
	Malaysia	+60 3 5569 9080	k-sg.sales@kennametal.com
	New Zealand	+64 0800 536626	k-nz.service@kennametal.com
	Singapore*	+65 62659222	k-sg.sales@kennametal.com
	Taiwan	+886 4 2350 1920	taiwan.service@kennametal.com
	Thailand	+66 2 642 3455	k-sg.sales@kennametal.com

*Vietnam and Philippines individuals should contact the Singapore office.

Visit kennametal.com to find local Authorized Kennametal Distributors.



Online Catalog

Can't find your paper copy of our catalog anymore?


No worries. Go to catalogs.kennametal.com to see what's out there.

Search for what you need, watch a video, and share pages with others, all from one site! Go to catalogs.kennametal.com, and if you want to check it out on your mobile device, just download the FREE app for iOS or Android™.

1 Search for what you need

2 Watch videos

3 Share with others

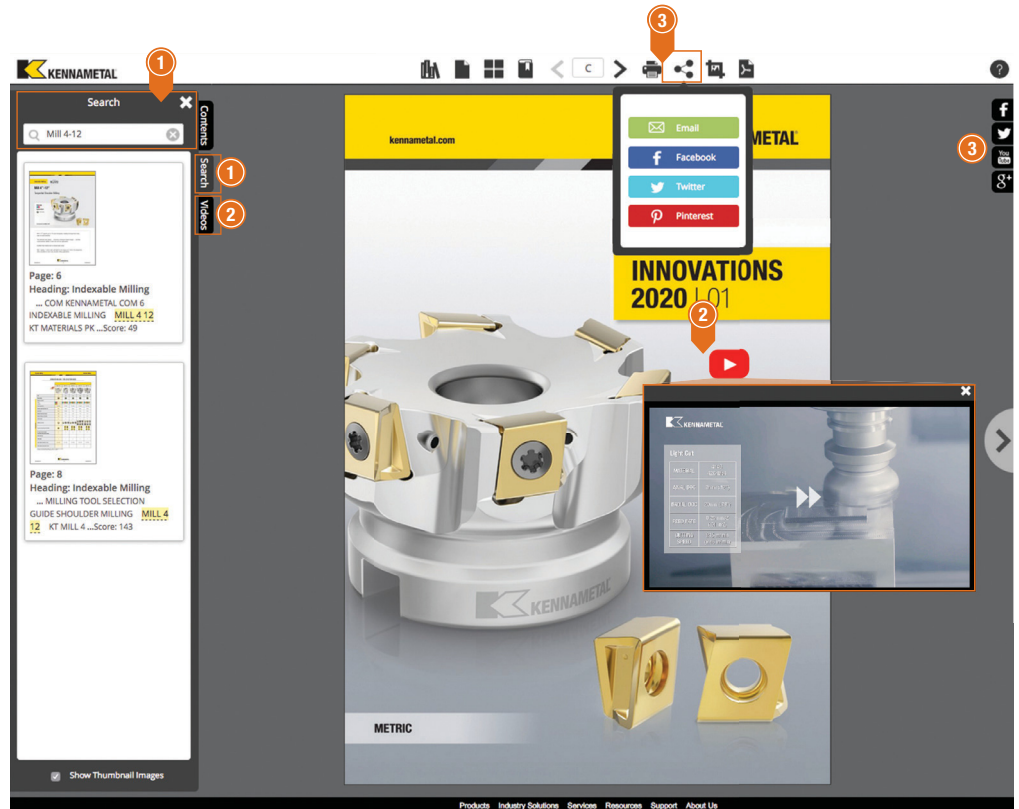

Check out our new catalog app.
Available in the Google Play™ Store or
the App Store®.



NOVO™



**Digitally access and leverage product data and knowledge
to connect systems and processes throughout
the entire manufacturing lifecycle.**

VISIT [KENNAMETAL.COM/NOVO](https://www.kennametal.com/novo).



KENGold™

CVD Coating Technology for ISO Turning Applications

Materials

P

Applications



Turning



Boring



Back Boring



Profiling



Facing



I.D. Facing



Chamfer Turning



KENGold™


KENGold is a multilayer coating technology featuring uniform layers that resist abrasion, provide a strong thermal barrier, improve edge toughness, and allow for easy detection of wear due to its gold flank.

Applied to the KCP25C turning insert grade, in combination with enhanced edge preparation features, customers will experience more reliable and consistent tool life.

This medium-temperature coating technology is comprised of $\text{TiCN-Al}_2\text{O}_3$. The composition can be broken down into four layers, each with unique protection properties:

Protects against flank wear

Offers easy identification of worn and/or unused edges (reducing waste)

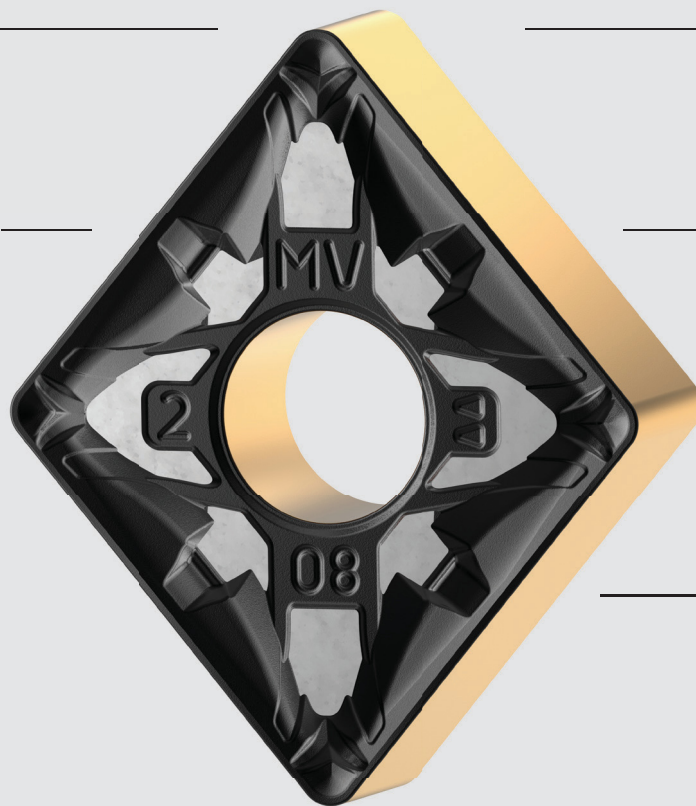

Resists wear (abrasion, chipping) and provides a strong thermal barrier

Increases output rate reliability and has consistent tool life

NEW!

MV geometry for medium versatile applications

- The outermost layer protects against flank wear and enables wear identification with its gold color TiCN top layer. This improves abrasion resistance within the KCP25C grade.
- The second layer is comprised of a black Al_2O_3 coating with a recently developed uniform nanostructure to act as a strong thermal barrier that resists wear.
- The third layer is a transition layer that bonds the tough and wear-resistant layers.
- The fourth layer resists chipping with its highly uniform crystal structure within the medium-temperature TiCN coating layer. This also enables improved toughness and greater wear resistance.

ISO Inserts • Catalog Numbering System

Each character in our catalog number signifies a specific trait of that product. Use the following key columns and corresponding images to easily identify which attributes apply.

ISO/ANSI Turning Inserts

ISO/ANSI Turning Inserts

Kenloc™ • CNMG insert • Negative • FN

- real choice
- alternate choice

ISO	ANSI	D	B	S	LWR	R ₁	R ₂
01	1	1.25	3.175	0.125	0.125	0.125	0.125
02	2	1.5	3.81	0.15	0.15	0.15	0.15
03	3	1.75	4.445	0.175	0.175	0.175	0.175
04	4	2.0	5.08	0.2	0.2	0.2	0.2
05	5	2.5	6.35	0.25	0.25	0.25	0.25
06	6	3.175	8.075	0.3175	0.3175	0.3175	0.3175
07	7	3.81	9.75	0.381	0.381	0.381	0.381
08	8	4.445	11.43	0.4445	0.4445	0.4445	0.4445
09	9	5.08	12.95	0.508	0.508	0.508	0.508
10	10	6.35	16.26	0.635	0.635	0.635	0.635
11	11	7.62	19.4	0.762	0.762	0.762	0.762
12	12	8.9	22.6	0.89	0.89	0.89	0.89
13	13	10.175	25.9	1.0175	1.0175	1.0175	1.0175
14	14	11.45	29.175	1.145	1.145	1.145	1.145
15	15	12.725	32.45	1.2725	1.2725	1.2725	1.2725
16	16	14.0	35.7	1.4	1.4	1.4	1.4
17	17	15.275	38.975	1.5275	1.5275	1.5275	1.5275
18	18	16.55	42.25	1.655	1.655	1.655	1.655
19	19	17.825	45.525	1.7825	1.7825	1.7825	1.7825
20	20	19.1	48.8	1.91	1.91	1.91	1.91
21	21	20.375	52.075	2.0375	2.0375	2.0375	2.0375
22	22	21.65	55.35	2.165	2.165	2.165	2.165
23	23	22.925	58.625	2.2925	2.2925	2.2925	2.2925
24	24	24.2	61.9	2.42	2.42	2.42	2.42
25	25	25.475	65.175	2.5475	2.5475	2.5475	2.5475
26	26	26.75	68.45	2.675	2.675	2.675	2.675
27	27	28.025	71.725	2.8025	2.8025	2.8025	2.8025
28	28	29.3	75.0	2.93	2.93	2.93	2.93
29	29	30.575	78.275	3.0575	3.0575	3.0575	3.0575
30	30	31.85	81.55	3.185	3.185	3.185	3.185
31	31	33.125	84.825	3.3125	3.3125	3.3125	3.3125
32	32	34.4	88.1	3.44	3.44	3.44	3.44
33	33	35.675	91.375	3.5675	3.5675	3.5675	3.5675
34	34	36.95	94.65	3.695	3.695	3.695	3.695
35	35	38.225	97.925	3.8225	3.8225	3.8225	3.8225
36	36	39.5	101.2	3.95	3.95	3.95	3.95
37	37	40.775	104.475	4.0775	4.0775	4.0775	4.0775
38	38	42.05	107.75	4.205	4.205	4.205	4.205
39	39	43.325	111.025	4.3325	4.3325	4.3325	4.3325
40	40	44.6	114.3	4.46	4.46	4.46	4.46
41	41	45.875	117.575	4.5875	4.5875	4.5875	4.5875
42	42	47.15	120.85	4.715	4.715	4.715	4.715
43	43	48.425	124.125	4.8425	4.8425	4.8425	4.8425
44	44	49.7	127.4	4.97	4.97	4.97	4.97
45	45	50.975	130.675	5.0975	5.0975	5.0975	5.0975
46	46	52.25	133.95	5.225	5.225	5.225	5.225
47	47	53.525	137.225	5.3525	5.3525	5.3525	5.3525
48	48	54.8	140.5	5.48	5.48	5.48	5.48
49	49	56.075	143.775	5.6075	5.6075	5.6075	5.6075
50	50	57.35	147.05	5.735	5.735	5.735	5.735
51	51	58.625	150.325	5.8625	5.8625	5.8625	5.8625
52	52	59.9	153.6	5.99	5.99	5.99	5.99
53	53	61.175	156.875	6.1175	6.1175	6.1175	6.1175
54	54	62.45	160.15	6.245	6.245	6.245	6.245
55	55	63.725	163.425	6.3725	6.3725	6.3725	6.3725
56	56	65.0	166.7	6.5	6.5	6.5	6.5
57	57	66.275	169.975	6.6275	6.6275	6.6275	6.6275
58	58	67.55	173.25	6.755	6.755	6.755	6.755
59	59	68.825	176.525	6.8825	6.8825	6.8825	6.8825
60	60	70.1	179.8	7.01	7.01	7.01	7.01
61	61	71.375	183.075	7.1375	7.1375	7.1375	7.1375
62	62	72.65	186.35	7.265	7.265	7.265	7.265
63	63	73.925	189.625	7.3925	7.3925	7.3925	7.3925
64	64	75.2	192.9	7.52	7.52	7.52	7.52
65	65	76.475	196.175	7.6475	7.6475	7.6475	7.6475
66	66	77.75	199.45	7.775	7.775	7.775	7.775
67	67	79.025	202.725	7.9025	7.9025	7.9025	7.9025
68	68	80.3	206.0	8.03	8.03	8.03	8.03
69	69	81.575	209.275	8.1575	8.1575	8.1575	8.1575
70	70	82.85	212.55	8.285	8.285	8.285	8.285
71	71	84.125	215.825	8.4125	8.4125	8.4125	8.4125
72	72	85.4	219.1	8.54	8.54	8.54	8.54
73	73	86.675	222.375	8.6675	8.6675	8.6675	8.6675
74	74	87.95	225.65	8.795	8.795	8.795	8.795
75	75	89.225	228.925	8.9225	8.9225	8.9225	8.9225
76	76	90.5	232.2	9.05	9.05	9.05	9.05
77	77	91.775	235.475	9.1775	9.1775	9.1775	9.1775
78	78	93.05	238.75	9.305	9.305	9.305	9.305
79	79	94.325	242.025	9.4325	9.4325	9.4325	9.4325
80	80	95.6	245.3	9.56	9.56	9.56	9.56
81	81	96.875	248.575	9.6875	9.6875	9.6875	9.6875
82	82	98.15	251.85	9.815	9.815	9.815	9.815
83	83	99.425	255.125	9.9425	9.9425	9.9425	9.9425
84	84	100.7	258.4	10.07	10.07	10.07	10.07
85	85	101.975	261.675	10.1975	10.1975	10.1975	10.1975
86	86	103.25	264.95	10.325	10.325	10.325	10.325
87	87	104.525	268.225	10.4525	10.4525	10.4525	10.4525
88	88	105.8	271.5	10.58	10.58	10.58	10.58
89	89	107.075	274.775	10.7075	10.7075	10.7075	10.7075
90	90	108.35	278.05	10.835	10.835	10.835	10.835
91	91	109.625	281.325	10.9625	10.9625	10.9625	10.9625
92	92	110.9	284.6	11.09	11.09	11.09	11.09
93	93	112.175	287.875	11.2175	11.2175	11.2175	11.2175
94	94	113.45	291.15	11.345	11.345	11.345	11.345
95	95	114.725	294.425	11.4725	11.4725	11.4725	11.4725
96	96	116.0	297.7	11.6	11.6	11.6	11.6
97	97	117.275	300.975	11.7275	11.7275	11.7275	11.7275
98	98	118.55	304.25	11.855	11.855	11.855	11.855
99	99	119.825	307.525	11.9825	11.9825	11.9825	11.9825
100	100	121.1	310.8	12.11	12.11	12.11	12.11


CNMG431MV

C	N	M	G	4																																																																																																																																																																																																																								
Insert Shape	Insert Clearance Angle	Tolerance Class	Insert Features	Size																																																																																																																																																																																																																								
H Hexagon 120°	A 3°	Tolerances apply prior to edge prep and coating. D = Theoretical diameter of the insert inscribed circle S = Thickness B = See figures below	N R F A M G W T Q U B H C J X Special Design	Code for inch cutting edge length "L10" <table><tr><th>inch</th><th>mm</th><th>C</th><th>D</th><th>R</th><th>S</th><th>T</th><th>V</th><th>W</th></tr><tr><td>1.2 (5)</td><td>3,97</td><td>S4</td><td>04</td><td>03</td><td>03</td><td>06</td><td>—</td><td>—</td></tr><tr><td>1.5 (6)</td><td>4,76</td><td>04</td><td>05</td><td>04</td><td>04</td><td>08</td><td>08</td><td>S3</td></tr><tr><td>1.8 (7)</td><td>5,56</td><td>05</td><td>06</td><td>05</td><td>05</td><td>09</td><td>09</td><td>03</td></tr><tr><td>—</td><td>6,00</td><td>—</td><td>—</td><td>06</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>2</td><td>6,35</td><td>06</td><td>07</td><td>06</td><td>06</td><td>11</td><td>11</td><td>04</td></tr><tr><td>2.5</td><td>7,94</td><td>08</td><td>09</td><td>07</td><td>07</td><td>13</td><td>13</td><td>05</td></tr><tr><td>—</td><td>8,00</td><td>—</td><td>—</td><td>08</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>3</td><td>9,52</td><td>09</td><td>11</td><td>09</td><td>09</td><td>16</td><td>16</td><td>06</td></tr><tr><td>—</td><td>10,00</td><td>—</td><td>—</td><td>10</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>3.5</td><td>11,11</td><td>11</td><td>13</td><td>11</td><td>11</td><td>19</td><td>19</td><td>07</td></tr><tr><td>—</td><td>12,00</td><td>—</td><td>—</td><td>12</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>4</td><td>12,70</td><td>12</td><td>15</td><td>12</td><td>12</td><td>22</td><td>22</td><td>08</td></tr><tr><td>4.5</td><td>14,29</td><td>14</td><td>17</td><td>14</td><td>14</td><td>24</td><td>24</td><td>09</td></tr><tr><td>5</td><td>15,88</td><td>16</td><td>19</td><td>15</td><td>15</td><td>27</td><td>27</td><td>10</td></tr><tr><td>—</td><td>16,00</td><td>—</td><td>—</td><td>16</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>5.5</td><td>17,46</td><td>17</td><td>21</td><td>17</td><td>17</td><td>30</td><td>30</td><td>11</td></tr><tr><td>6</td><td>19,05</td><td>19</td><td>23</td><td>19</td><td>19</td><td>33</td><td>33</td><td>13</td></tr><tr><td>—</td><td>20,00</td><td>—</td><td>—</td><td>20</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>7</td><td>22,22</td><td>22</td><td>27</td><td>22</td><td>22</td><td>38</td><td>38</td><td>15</td></tr><tr><td>—</td><td>25,00</td><td>—</td><td>—</td><td>25</td><td>—</td><td>—</td><td>—</td><td>—</td></tr><tr><td>8</td><td>25,40</td><td>25</td><td>31</td><td>25</td><td>25</td><td>44</td><td>44</td><td>17</td></tr><tr><td>10</td><td>31,75</td><td>32</td><td>38</td><td>31</td><td>31</td><td>54</td><td>54</td><td>21</td></tr><tr><td>—</td><td>32,00</td><td>—</td><td>—</td><td>32</td><td>—</td><td>—</td><td>—</td><td>—</td></tr></table>	inch	mm	C	D	R	S	T	V	W	1.2 (5)	3,97	S4	04	03	03	06	—	—	1.5 (6)	4,76	04	05	04	04	08	08	S3	1.8 (7)	5,56	05	06	05	05	09	09	03	—	6,00	—	—	06	—	—	—	—	2	6,35	06	07	06	06	11	11	04	2.5	7,94	08	09	07	07	13	13	05	—	8,00	—	—	08	—	—	—	—	3	9,52	09	11	09	09	16	16	06	—	10,00	—	—	10	—	—	—	—	3.5	11,11	11	13	11	11	19	19	07	—	12,00	—	—	12	—	—	—	—	4	12,70	12	15	12	12	22	22	08	4.5	14,29	14	17	14	14	24	24	09	5	15,88	16	19	15	15	27	27	10	—	16,00	—	—	16	—	—	—	—	5.5	17,46	17	21	17	17	30	30	11	6	19,05	19	23	19	19	33	33	13	—	20,00	—	—	20	—	—	—	—	7	22,22	22	27	22	22	38	38	15	—	25,00	—	—	25	—	—	—	—	8	25,40	25	31	25	25	44	44	17	10	31,75	32	38	31	31	54	54	21	—	32,00	—	—	32	—	—	—	—
inch	mm	C	D	R	S	T	V	W																																																																																																																																																																																																																				
1.2 (5)	3,97	S4	04	03	03	06	—	—																																																																																																																																																																																																																				
1.5 (6)	4,76	04	05	04	04	08	08	S3																																																																																																																																																																																																																				
1.8 (7)	5,56	05	06	05	05	09	09	03																																																																																																																																																																																																																				
—	6,00	—	—	06	—	—	—	—																																																																																																																																																																																																																				
2	6,35	06	07	06	06	11	11	04																																																																																																																																																																																																																				
2.5	7,94	08	09	07	07	13	13	05																																																																																																																																																																																																																				
—	8,00	—	—	08	—	—	—	—																																																																																																																																																																																																																				
3	9,52	09	11	09	09	16	16	06																																																																																																																																																																																																																				
—	10,00	—	—	10	—	—	—	—																																																																																																																																																																																																																				
3.5	11,11	11	13	11	11	19	19	07																																																																																																																																																																																																																				
—	12,00	—	—	12	—	—	—	—																																																																																																																																																																																																																				
4	12,70	12	15	12	12	22	22	08																																																																																																																																																																																																																				
4.5	14,29	14	17	14	14	24	24	09																																																																																																																																																																																																																				
5	15,88	16	19	15	15	27	27	10																																																																																																																																																																																																																				
—	16,00	—	—	16	—	—	—	—																																																																																																																																																																																																																				
5.5	17,46	17	21	17	17	30	30	11																																																																																																																																																																																																																				
6	19,05	19	23	19	19	33	33	13																																																																																																																																																																																																																				
—	20,00	—	—	20	—	—	—	—																																																																																																																																																																																																																				
7	22,22	22	27	22	22	38	38	15																																																																																																																																																																																																																				
—	25,00	—	—	25	—	—	—	—																																																																																																																																																																																																																				
8	25,40	25	31	25	25	44	44	17																																																																																																																																																																																																																				
10	31,75	32	38	31	31	54	54	21																																																																																																																																																																																																																				
—	32,00	—	—	32	—	—	—	—																																																																																																																																																																																																																				
O Octagon 135°	B 5°																																																																																																																																																																																																																											
P Pentagon 108°	C 7°																																																																																																																																																																																																																											
R Round —	D 15°																																																																																																																																																																																																																											
S Square 90°	E 20°																																																																																																																																																																																																																											
T Triangular 60°	F 25°																																																																																																																																																																																																																											
C D E M V Rhomboid 80° 55° 75° 86° 35°	G 30°																																																																																																																																																																																																																											
W Trigon 80° with enlarged corner angles	N 0°																																																																																																																																																																																																																											
L Rectangular 90°	P 11°																																																																																																																																																																																																																											
A B N/K Parallelogram 85° 82° 55°	O Indicated for other clearance angles requiring descriptions.																																																																																																																																																																																																																											

tolerance class	tolerance on "D"	tolerance on "B"	tolerance on "S"
C	±0,025	±0,013	±0,025
H	±0,013	±0,013	±0,025
E	±0,025	±0,025	±0,025
G	±0,025	±0,025	±0,013
M	See tables on next page		±0,013
U	See tables on next page		±0,013

ISO Inserts • Catalog Numbering System

(continued)

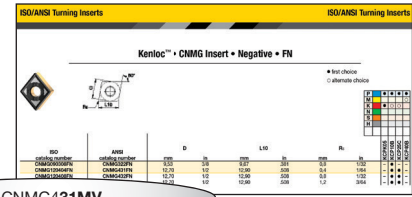

CNMG431MV

3Thickness
S

symbol	thickness
mm	mm
—	0,79
T0	1,00
01	1,59
T1	1,98
02	2,38
03	3,18
T3	3,97
04	4,76
05	5,56
06	6,35
07	7,94
9	9,52
11	11,11
12	12,70

1Corner
Radius "Rε"




symbol	corner radius
mm	mm
X0	0,04
01	0,1
02	0,2
04	0,4
08	0,8
12	1,2
16	1,6
20	2,0
24	2,4
28	2,8
32	3,2
00	round insert
MO	
—	

Hand of Insert
(optional)

R = Right hand

L = Left hand

N = Neutral

Cutting Edge
(optional)

F	Sharp
E	Rounded
T	Chamfered
S	Chamfered and Rounded
K	Double-Chamfered
P	Double-Chamfered and Rounded

MVChipbreaker
(optional)

F	= Sharp
FF	= Fine Finishing
FN	= Finishing Negative
MV	= Medium Versatile
MN	= Medium Negative
MR	= Medium Roughing
RN	= Roughing Negative
UN	= Universal Medium
FP	= Finishing Positive
MP	= Medium Positive
RP	= Roughing Positive
RM	= Roughing Medium
RH	= Roughing Heavy
FW	= Finishing Wiper
MW	= Medium Wiper
FS	= Finishing Sharp
MS	= Medium Sharp
RW	= Roughing Wiper
HP	= High Positive
UP	= Universal Positive
K	= Light-Feed Chip Control
UF	= Ultra-Fine Finishing
LF	= Light Finishing
MF	= Medium Finishing
E	= Hone Only
T	= Negative Land
S	= Negative Land Plus Hone
MP-K	= Medium Positive
MG-P	= Medium Positive

"D"	± Tolerance on "D"				"D"	± Tolerance on "B"			
	Class M Tolerance			Class U Tolerance		Class M Tolerance			Class U Tolerance
	Shapes S, T, C, R, & W	Shape D	Shape V	Shapes S, T, & C		Shapes S, T, C, R, & W	Shape D	Shape V	Shapes S, T, & C
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
3,97	0,05	—	—	—	3,97	0,08	—	—	—
4,76	0,05	—	—	0,08	4,76	0,08	—	—	0,13
5,56	0,05	0,05	0,05	0,08	5,56	0,08	0,11	—	0,13
6,35	0,05	0,05	0,05	0,08	6,35	0,08	0,11	—	0,13
7,94	0,05	0,05	0,05	0,08	7,94	0,08	0,11	—	0,13
9,52	0,05	0,05	0,05	0,08	9,52	0,08	0,11	0,18	0,13
11,11	0,08	0,08	0,08	0,13	11,11	0,13	0,15	—	—
12,70	0,08	0,08	0,08	0,13	12,70	0,13	0,15	0,25	0,20
14,29	0,08	0,08	0,08	0,13	14,29	0,13	0,15	—	—
15,88	0,10	0,10	0,10	0,18	15,88	0,15	0,18	—	0,27
17,46	0,10	0,10	0,10	0,18	17,46	0,15	0,18	—	0,27
19,05	0,10	0,10	0,10	0,18	19,05	0,15	0,18	—	0,27
22,22	0,13	—	—	0,25	22,22	0,15	—	—	0,38
25,40	0,13	—	—	0,25	25,40	0,18	—	—	0,38
31,75	0,15	—	—	0,25	31,75	0,20	—	—	0,38

Turning Grades • Catalog Numbering System





A system of grades, geometries, and application guidelines to provide optimal solutions for your metalcutting needs. It's easy to determine which Kennametal chip-control cutting tool will work best in your specific workpiece materials and applications!

K	C	P	M	25	B
Brand	Insert Material	Primary Workpiece Material (ISO 513)	Secondary Workpiece Material (optional)	Application Range	Coating Generation
K = Kennametal	Blank = Carbide, uncoated C = Carbide, coated T = Cermet Y = Ceramic D = PCD B = PcBN	P Steel M Stainless Steel K Cast Iron N Non-Ferrous S High-Temp Alloys H Hardened Materials U Universal Machining	Hardest ↑ 5 fine finishing 10 finishing 15 20 medium to roughing 25 30 roughing 35 40 45 heaviest roughing 50 ↓ Toughest	B = Beyond™ Drive™ C = KENGold™ etc.	

NOTE: Application range does not apply to PcBN grades.

Turning Technical Tips

Insert Shape	Stability						
	High						Low
	R Round	S Square	C Rhombic	W Trigon	T Triangular	D Rhombic	V Rhombic
							
Clamping Stability	++	++++	+++	++	++	+	+
Application	- Length, Face, and Profile Turning - High-Feed Capability	Length and Face Turning	Length, Face, and 90° Shoulder Turning	Length, Face, and 90° Shoulder Turning	Length, Face, Undercut, and 90° Shoulder Turning	Length, Face, Undercut, and 90° Shoulder Turning	Length, Face, Undercut, and 90° Shoulder Turning

	Positive Style Screw-On Inserts	Negative Style Kenloc™ Inserts
	 	 
Advantages	- Shears metal, free cutting action. - Directs chip away from workpiece, generates less heat. - Less horsepower consumption, ideal for smaller and medium lathes.	- Strong cutting edge withstands higher cutting forces. - More mass to dissipate heat. - Double-sided design, more cutting edges. - Higher metal removal rate capability, ideal for medium to large lathes.
Disadvantages	- Smaller cross section at point of contact, less cutting edge stability. - Single-sided design, fewer cutting edges. - Transverse rupture strength versus compressive strength.	- Compresses metal and directs chip towards workpiece. - High pressure required. - Higher horsepower consumption. - Generates more heat.
Application Recommendation	- Medium to fine finishing. - Smooth cuts. - Instable cutting conditions. - OD of small parts and shallow grooves. - First choice for ID applications.	- Roughing to semi finishing. - Interrupted cuts. - Stable workpiece clamping. - OD and ID of diameter larger than 1.26"/32mm.

Selection Guide


1

Select the insert geometry

Given: depth of cut = .040" (1 mm)
feed rate = .016 IPR (0,4mm)

Unknown: insert geometry
Solution: -MN

 = Example

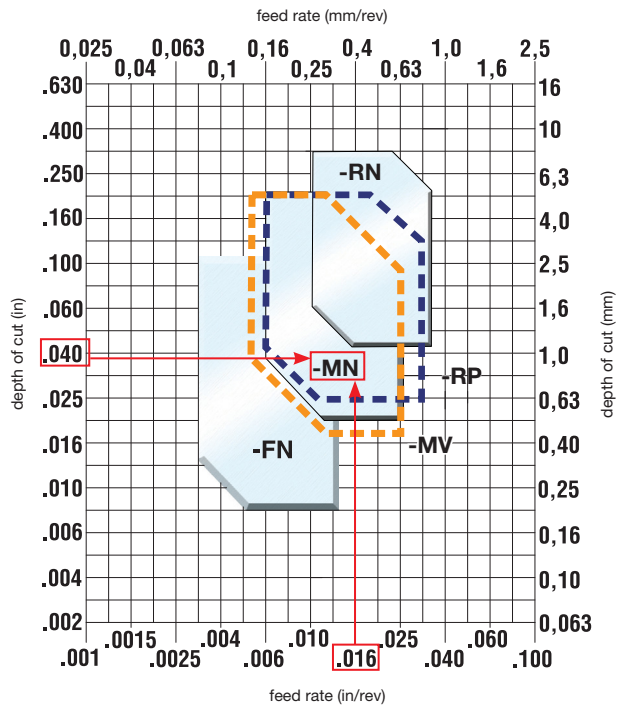

Negative Inserts

Roughing



RN –
Roughing
Negative




RP –
Roughing
Positive

Medium Machining




MV –
Medium
Versatile




MN –
Medium
Negative

Finishing



FN –
Finishing
Negative

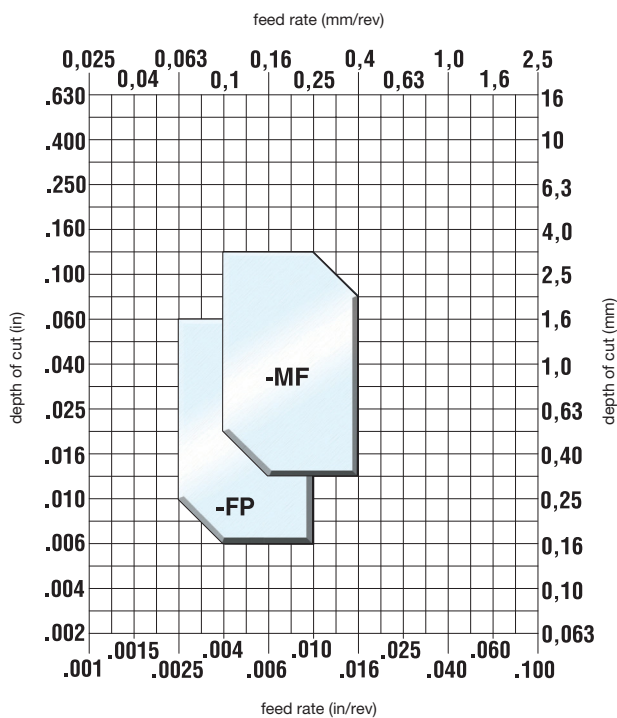

Positive Inserts

Medium Machining



MF –
Medium
Finishing

Finishing



FP –
Finishing
Positive

Selection Guide

(continued)

2

Select the grade

Given: cutting conditions:
lightly interrupted cut
Geometry: -MN



Unknown: grade
Solution: KCP25C

= Example

Cutting Condition		Negative Insert					Positive Insert	
		FN	MV	MN	RP	RN	FP	MF
Heavily Interrupted Cut		KCP25C	KCP40B	KCP40B	KCP40B	KCP40B	KCP25C	KCP25C
Lightly Interrupted Cut		KCP25C	KCP25C	KCP25C	KCP25C	KCP25C	KCP25C	KCP25C
Varying Depth of Cut, Casting, or Forging Skin		KCP10B	KCP10B	KCP10B	KCP10B	KCP10B	KCP10B	KCP10B
Smooth Cut, Pre-Turned Surface		KCP10B	KCPK05	KCP10B	KCPK05	KCPK05	KCP10B	KCP10B

3

Select the cutting speed

Given: grade KCP25C
cutting conditions
material CK15



Unknown: cutting speed
Solution: 1080 SFM (330 m/min)

= Example

Low-Carbon (<0.3% C) and Free-Machining Steel

speed — m/min (SFM)

Starting Conditions

material group	grade	135 (450)	180 (600)	225 (750)	275 (900)	320 (1050)	360 (1200)	410 (1350)	455 (1500)	495 (1650)	m/min	SFM
P0/P1	KCPK05										405	1330
	KCP10B										395	1300
	KCP25C										330	1080
	KCP40B										210	700

Medium- and High-Carbon Steels (>0.3% C)

speed — m/min (SFM)

Starting Conditions

material group	grade	135 (450)	180 (600)	225 (750)	275 (900)	320 (1050)	360 (1200)	410 (1350)	455 (1500)	495 (1650)	m/min	SFM
P2	KCPK05										280	920
	KCP10B										265	870
	KCP25C										235	770
	KCP40B										150	500

Alloy Steels and Tool Steels (≤330 HB) (≤35 HRC)

speed — m/min (SFM)

Starting Conditions

material group	grade	135 (450)	180 (600)	225 (750)	275 (900)	320 (1050)	360 (1200)	410 (1350)	455 (1500)	495 (1650)	m/min	SFM
P3	KCPK05										195	640
	KCP10B										190	620
	KCP25C										185	610
	KCP40B										120	400

Alloy Steels and Tool Steels (340–450 HB) (36–48 HRC)

speed — m/min (SFM)

Starting Conditions

material group	grade	60 (200)	90 (300)	120 (400)	150 (500)	180 (600)	210 (700)	240 (800)	270 (900)	300 (1000)	m/min	SFM
P4	KCPK05										155	510
	KCP10B										145	480
	KCP25C										125	410
	KCP40B										95	310

Ferritic, Martensitic, and PH Stainless Steels (≤330 HB) (≤35 HRC)

speed — m/min (SFM)

Starting Conditions

material group	grade	120 (400)	150 (500)	180 (600)	210 (700)	240 (800)	270 (900)	300 (1000)	330 (1100)	360 (1200)	m/min	SFM
P5	KCPK05										230	750
	KCP10B										215	710
	KCP25C										235	770
	KCP40B										135	440

Ferritic, Martensitic, and PH Stainless Steels (340–450 HB) (36–48 HRC)






speed — m/min (SFM)

Starting Conditions



material group	grade	105 (350)	135 (450)	165 (550)	195 (650)	225 (750)	255 (850)	285 (950)	315 (1050)	345 (1150)	m/min	SFM
P6	KCPK05										190	620
	KCP10B										180	590
	KCP25C										180	590
	KCP40B										105	340

Chip Control Geometries

Kenloc™ Inserts

Type of Operation	Insert Geometry	3	Profile	4	feed rate — in (mm)										
					.0015 (0,04)	.0025 (0,063)	.004 (0,1)	.006 (0,16)	.010 (0,25)	.016 (0,4)	.025 (0,63)	.040 (1,0)	.060 (1,6)	.100 (2,5)	.200 (5,0)
					depth of cut — in (mm)										
1 Finishing	2 MG-FN	P M K N S H			5 .003-.012 (0,08-0,3)										
					6 .008-.125 (0,2-3,0)										
Medium Machining	MG-MV	P K									.006-.02 (0,15-0,50)				
											.02-.22 (0,50-5,5)				
Medium Machining	MG-MN	P									.008-.0125 (0,12-0,6)				
											.012-.200 (0,3-5,0)				
Roughing	MG-RP	P K									.007-.028 (0,18-0,7)				
											.024-.200 (0,6-5,0)				
Roughing	MG-RN	P K									.010-.030 (0,25-0,8)				
											.045-.275 (1,1-7,0)				

Screw-On Inserts

Finishing	MT-FP	P M K S									.0025-.010 (0,063-0,25)				
											.006-.060 (0,16-1,6)				
Medium Machining	MT-MF	P M K S									.004-.016 (0,1-0,4)				
											.012-.125 (0,32-3,2)				

1

Machining Operation —
for what the insert geometry is designed

2

Chip Control Geometry Designation —
example: MG-MV = CNMG-432MV

3

**Primary Workpiece
Material Group**

4

Chipbreaker Geometry —
section is through nose radius of insert


5

Feed Rate Range —
for best results, use the center 60% of the range

6

Depth-of-Cut Range —
for all inserts in the program, select smaller inserts
for lighter cuts and larger inserts for heavy cuts


Kenloc™ • CNMG Insert • Negative • FN



- alternate choice


P		●	●	●	●
M					○
K		●	○	○	
N					
S					
H					
		KCPK05	KCP10B	KCP25C	KCP40B
	—	—	●	—	—
	—	—	●	—	—
	—	—	●	—	—

Kenloc • CNMG Insert • Negative • MV




- alternate choice

	P	M	K	N	S	H			KCP005	KCP10B	KCP25C	KCP40B
									—	●	●	—
									—	●	●	—
									●	●	●	●
									—	●	●	—
									●	●	●	●
									—	●	●	—
									●	●	●	●
									—	●	●	—



Kenloc™ • CNMG Insert • Negative • MN




● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
CNMG090304MN	9,53	9,67	0,4	—	—	—	—
CNMG090308MN	9,53	9,67	0,8	—	—	—	—
CNMG120404MN	12,70	12,90	0,4	—	—	—	—
CNMG120408MN	12,70	12,90	0,8	—	—	—	—
CNMG120412MN	12,70	12,90	1,2	—	—	—	—
CNMU120612MN	12,70	12,90	1,2	—	—	—	—
CNMG120416MN	12,70	12,90	1,6	—	—	—	—
CNMG160608MN	15,88	16,12	0,8	—	—	—	—
CNMG160612MN	15,88	16,12	1,2	—	—	—	—
CNMG160616MN	15,88	16,12	1,6	—	—	—	—
CNMG190608MN	19,05	19,34	0,8	—	—	—	—
CNMG190612MN	19,05	19,34	1,2	—	—	—	—
CNMG190616MN	19,05	19,34	1,6	—	—	—	—
CNMG190624MN	19,05	19,34	2,4	—	—	—	—

Kenloc • CNMG Insert • Negative • RP



● first choice


○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
CNMG120404RP	12,70	12,90	0,4	—	—	—	—
CNMG120408RP	12,70	12,90	0,8	—	—	—	—
CNMG120412RP	12,70	12,90	1,2	—	—	—	—
CNMG120416RP	12,70	12,90	1,6	—	—	—	—
CNMG160608RP	15,88	16,12	0,8	—	—	—	—
CNMG160612RP	15,88	16,12	1,2	—	—	—	—
CNMG160616RP	15,88	16,12	1,6	—	—	—	—
CNMG190612RP	19,05	19,34	1,2	—	—	—	—
CNMG190616RP	19,05	19,34	1,6	—	—	—	—

29	30	8-10	5

Kenloc™ • CNMG Insert • Negative • RN





● first choice

○ alternate choice

P	●	●	●	●	●
M	●	●	●	●	○
K	●	●	○	○	○
N	●	●	●	●	●
S	●	●	●	●	●
H	●	●	●	●	●

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
CNMG120408RN	12,70	12,90	0,8	●	●	●	●
CNMG120412RN	12,70	12,90	1,2	●	●	●	●
CNMG120416RN	12,70	12,90	1,6	—	●	●	●
CNMG160608RN	15,88	16,12	0,8	—	●	●	—
CNMG160612RN	15,88	16,12	1,2	●	●	●	●
CNMG160616RN	15,88	16,12	1,6	—	●	●	●
CNMG190608RN	19,05	19,34	0,8	—	●	—	—
CNMG190612RN	19,05	19,34	1,2	—	●	●	●
CNMG190616RN	19,05	19,34	1,6	—	●	●	●
CNMG190624RN	19,05	19,34	2,4	—	—	●	—

Kenloc • DNMG Insert • Negative • FN




● first choice

○ alternate choice

P	●	●	●	●	●
M	●	●	●	●	○
K	●	●	○	○	○
N	●	●	●	●	●
S	●	●	●	●	●
H	●	●	●	●	●

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
DNMG110404FN	9,53	11,63	0,4	—	●	●	—
DNMG110408FN	9,53	11,63	0,8	—	●	●	—
DNMG110412FN	9,53	11,63	1,2	—	●	—	—
DNMG150404FN	12,70	15,50	0,4	—	●	●	—
DNMG150604FN	12,70	15,50	0,4	—	●	●	—
DNMG150408FN	12,70	15,50	0,8	—	●	●	—
DNMG150608FN	12,70	15,50	0,8	—	●	●	—
DNMG150412FN	12,70	15,50	1,2	—	●	—	—
DNMG150612FN	12,70	15,50	1,2	—	●	—	—

Kenloc • DNMG Insert • Negative • MV




● first choice

○ alternate choice

P	●	●	●	●	●
M	●	●	●	●	○
K	●	●	○	○	○
N	●	●	●	●	●
S	●	●	●	●	●
H	●	●	●	●	●

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
DNMG110404MV	9,53	11,63	0,4	—	●	●	—
DNMG110408MV	9,53	11,63	0,8	—	●	●	—
DNMG110412MV	9,53	11,63	1,2	—	●	—	—
DNMG150404MV	12,70	15,50	0,4	—	●	●	—
DNMG150604MV	12,70	15,50	0,4	—	●	●	—
DNMG150408MV	12,70	15,50	0,8	—	●	●	—
DNMG150608MV	12,70	15,50	0,8	—	●	●	—
DNMG150412MV	12,70	15,50	1,2	—	●	—	—
DNMG150612MV	12,70	15,50	1,2	—	●	—	—

Kenloc™ • DNMG Insert • Negative • MN




● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
DNMG110404MN	9,53	11,63	0,4	-	●	●	-
DNMG110408MN	9,53	11,63	0,8	-	●	●	-
DNMG110412MN	9,53	11,63	1,2	-	-	●	-
DNMG150404MN	12,70	15,50	0,4	-	●	●	-
DNMG150604MN	12,70	15,50	0,4	-	●	●	-
DNMG150408MN	12,70	15,50	0,8	●	●	●	-
DNMG150608MN	12,70	15,50	0,8	-	●	●	-
DNMG150412MN	12,70	15,50	1,2	-	●	●	●
DNMG150612MN	12,70	15,50	1,2	-	●	●	●

Kenloc • DNMG Insert • Negative • RP



● first choice


○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
DNMG110408RP	9,53	11,63	0,8	-	-	●	-
DNMG110412RP	9,53	11,63	1,2	-	-	●	-
DNMG150408RP	12,70	15,50	0,8	-	●	●	-
DNMG150608RP	12,70	15,50	0,8	-	●	●	-
DNMG150412RP	12,70	15,50	1,2	-	●	●	-
DNMG150612RP	12,70	15,50	1,2	-	●	●	-
DNMG150616RP	12,70	15,50	1,6	-	●	-	-

29	30	8-10	5

Kenloc™ • DNMG Insert • Negative • RN





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Re	KCPK05	KCP10B	KCP25C	KCP40B
DNMG150408RN	12,70	15,50	0,8	●	●	●	●
DNMG150608RN	12,70	15,50	0,8	●	●	●	●
DNMG150412RN	12,70	15,50	1,2	●	●	●	●
DNMG150612RN	12,70	15,50	1,2	●	●	●	●
DNMG150416RN	12,70	15,50	1,6	●	●	●	●
DNMG150616RN	12,70	15,50	1,6	●	●	●	●
DNMG190608RN	15,88	19,38	0,8	●	●	●	●
DNMG190612RN	15,88	19,38	1,2	●	●	●	●

Kenloc • SNMG Insert • Negative • FN





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Re	KCPK05	KCP10B	KCP25C	KCP40B
SNMG120404FN	12,70	12,70	0,4	●	●	●	●
SNMG120408FN	12,70	12,70	0,8	●	●	●	●
SNMG120412FN	12,70	12,70	1,2	●	●	●	●

Kenloc • SNMG Insert • Negative • MV



● first choice



○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Re	KCPK05	KCP10B	KCP25C	KCP40B
SNMG090308MV	9,53	9,53	0,8	●	●	●	●
SNMG120404MV	12,70	12,70	0,4	●	●	●	●
SNMG120408MV	12,70	12,70	0,8	●	●	●	●
SNMG120412MV	12,70	12,70	1,2	●	●	●	●
SNMG120416MV	12,70	12,70	1,6	●	●	●	●
SNMG150612MV	15,88	15,88	1,2	●	●	●	●
SNMG150616MV	15,88	15,88	1,6	●	●	●	●
SNMG190612MV	19,05	19,05	1,2	●	●	●	●
SNMG190616MV	19,05	19,05	1,6	●	●	●	●

29	30	8-10	5

Kenloc™ • SNMG Insert • Negative • MN





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
SNMG090308MN	9,53	9,53	0,8	-	●	●	-
SNMG120404MN	12,70	12,70	0,4	-	●	●	-
SNMG120408MN	12,70	12,70	0,8	-	●	●	●
SNMG120412MN	12,70	12,70	1,2	-	●	●	-
SNMG120416MN	12,70	12,70	1,6	-	-	●	-
SNMG150612MN	15,88	15,88	1,2	-	●	●	-
SNMG150616MN	15,88	15,88	1,6	-	-	●	-
SNMG190612MN	19,05	19,05	1,2	-	-	●	-

Kenloc • SNMG Insert • Negative • RP



● first choice



○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
SNMG120408RP	12,70	12,70	0,8	-	-	●	-
SNMG120412RP	12,70	12,70	1,2	-	●	●	-
SNMG150612RP	15,88	15,88	1,2	-	●	●	-
SNMG150616RP	15,88	15,88	1,6	-	●	●	-
SNMG190612RP	19,05	19,05	1,2	-	-	●	●
SNMG190616RP	19,05	19,05	1,6	-	-	●	-

29	30	8-10	5

Kenloc™ • SNMG Insert • Negative • RN





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
SNMG120408RN	12,70	12,70	0,8	●	●	●	●
SNMG120412RN	12,70	12,70	1,2	●	●	●	●
SNMG120416RN	12,70	12,70	1,6	●	●	●	●
SNMG150612RN	15,88	15,88	1,2	●	●	●	●
SNMG150616RN	15,88	15,88	1,6	●	●	●	●
SNMG190612RN	19,05	19,05	1,2	●	●	●	●
SNMG190616RN	19,05	19,05	1,6	●	●	●	●
SNMG250924	25,40	25,40	2,4	●	●	●	●

Kenloc • TNMG Insert • Negative • FN





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
TNMG160404FN	9,53	16,50	0,4	●	●	●	●
TNMG160408FN	9,53	16,50	0,8	●	●	●	●
TNMG160412FN	9,53	16,50	1,2	●	●	●	●
TNMG220408FN	12,70	22,00	0,8	●	●	●	●
TNMG220412FN	12,70	22,00	1,2	●	●	●	●

Kenloc • TNMG Insert • Negative • MV



● first choice


○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
TNMG160404MV	9,53	16,50	0,4	●	●	●	●
TNMG160408MV	9,53	16,50	0,8	●	●	●	●
TNMG160412MV	9,53	16,50	1,2	●	●	●	●
TNMG220404MV	12,70	22,00	0,4	●	●	●	●
TNMG220408MV	12,70	22,00	0,8	●	●	●	●
TNMG220412MV	12,70	22,00	1,2	●	●	●	●

29	30	8-10	5

Kenloc™ • TNMG Insert • Negative • MN




● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Re	KCPK05	KCP10B	KCP25C	KCP40B
TNMG160404MN	9,53	16,50	0,4	-	●	●	-
TNMG160408MN	9,53	16,50	0,8	-	●	●	-
TNMG160412MN	9,53	16,50	1,2	-	●	●	-
TNMG220404MN	12,70	22,00	0,4	-	●	●	-
TNMG220408MN	12,70	22,00	0,8	-	●	●	-
TNMG220412MN	12,70	22,00	1,2	-	●	●	-

Kenloc • TNMG Insert • Negative • RP





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Re	KCPK05	KCP10B	KCP25C	KCP40B
TNMG160408RP	9,53	16,50	0,8	-	●	●	-
TNMG160412RP	9,53	16,50	1,2	-	●	●	-
TNMG220408RP	12,70	22,00	0,8	-	●	●	-
TNMG220412RP	12,70	22,00	1,2	-	●	●	-
TNMG220416RP	12,70	22,00	1,6	-	●	●	-
TNMG220432RP	12,70	22,00	3,2	-	●	●	-
TNMG330924RP	19,05	33,00	2,4	-	-	-	●

Kenloc • TNMG Insert • Negative • RN




● first choice


○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Re	KCPK05	KCP10B	KCP25C	KCP40B
TNMG160408RN	9,53	16,50	0,8	-	●	●	-
TNMG160412RN	9,53	16,50	1,2	-	●	●	-
TNMG220408RN	12,70	22,00	0,8	-	●	●	-
TNMG220412RN	12,70	22,00	1,2	-	●	●	-
TNMG220416RN	12,70	22,00	1,6	-	●	●	-
TNMG270612RN	15,88	27,50	1,2	-	●	●	-
TNMG270616RN	15,88	27,50	1,6	-	●	●	-
TNMG330924RN	19,05	33,00	2,4	-	●	●	-



Kenloc™ • VNMG Insert • Negative • FN




- first choice
○ alternate choice

P		●	●	●	●
M					○
K		●	○	○	
N					
S					
H					

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
VNMG160404FN	9,53	16,61	0,4	—	●	●	—
VNMG160408FN	9,53	16,61	0,8	—	●	●	—

Kenloc • VNMG Insert • Negative • MV




- first choice
○ alternate choice

P		●	●	●	●
M					○
K		●	○	○	
N					
S					
H					

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
VNMG160404MV	9,53	16,61	0,4	—	●	●	—
VNMG160408MV	9,53	16,61	0,8	—	●	●	—
VNMG160412MV	9,53	16,61	1,2	—	●	●	—


Kenloc • VNMG Insert • Negative • MN




- first choice
○ alternate choice

P		●	●	●	●
M					○
K		●	○	○	
N					
S					
H					

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
VNMG160404MN	9,53	16,61	0,4	—	●	●	—
VNMG160408MN	9,53	16,61	0,8	—	●	●	—
VNMG160412MN	9,53	16,61	1,2	—	●	●	—



Kenloc™ • VNMG Insert • Negative • RP





● first choice

○ alternate choice

P		●	●	●	●
M		●	●	●	○
K	●	○	○	○	○
N	●	○	○	○	○
S	●	○	○	○	○
H	●	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
VNMG160408RP	9,53	16,61	0,8	—	—	●	—
VNMG160412RP	9,53	16,61	1,2	—	—	●	—

Kenloc • WNMG Insert • Negative • FN





● first choice

○ alternate choice

P		●	●	●	●
M		●	●	●	○
K	●	○	○	○	○
N	●	○	○	○	○
S	●	○	○	○	○
H	●	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
WNMG060408FN	9,53	6,52	0,8	—	—	●	—
WNMG080404FN	12,70	8,69	0,4	—	—	●	—
WNMG080408FN	12,70	8,69	0,8	—	—	●	—

Kenloc • WNMG Insert • Negative • MV



● first choice



○ alternate choice

P		●	●	●	●
M		●	●	●	○
K	●	○	○	○	○
N	●	○	○	○	○
S	●	○	○	○	○
H	●	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
WNMG060408MV	9,52	6,52	0,8	—	●	●	—
WNMG060412MV	9,53	6,52	1,2	—	●	●	—
WNMG080408MV	12,70	8,69	0,8	—	●	●	—
WNMG080412MV	12,70	8,69	1,2	—	●	●	—
WNMG080416MV	12,70	8,69	1,6	—	●	●	—

29	30	8-10	5

Kenloc™ • WNMG Insert • Negative • MN



- first choice



- alternate choice

P		●	●	●	●
M	■			■	○
K		●	○	○	■
N					
S	■				
H	■				
		KCPK05	KCP10B	KCP25C	KCP40B
	—	—	●	●	—
	—	—	●	●	—
	—	—	●	●	—

ISO catalogue number
WNMG060408MN
WNMG080408MN
WNMG080412MN
WNMG080416MN

D	L10	R _E
9,53	6,52	0,8
12,70	8,69	0,8
12,70	8,69	1,2
12,70	8,69	1,6

Kenloc • WNMG Insert • Negative • RP



- first choice


- alternate choice

P		●	●	●	●
M	■				○
K		●	○	○	■
N	■				
S	■				
H	■				
		KCPK05	KCP10B	KCP25C	KCP40B
	—	—	●	●	—
	●	●	●	●	●
	—	—	●	—	—

ISO catalogue number
WNMG060408RP
WNMG060412RP
WNMG080408RP
WNMG080412RP
WNMG080416RP

D	L10	R£
9,53	6,52	0,8
9,53	6,52	1,2
12,70	8,69	0,8
12,70	8,69	1,2
12,70	8,69	1,6

Kenloc • WNMG Insert • Negative • RN






- first choice

- alternate choice



P	Blue	●	●	●	●
M	Yellow				○
K		●	○	○	
N	Green				
S	Orange				
H	Grey				
		KCPK05	KCP10B	KCP25C	KCP40B
		-	-	-	-
		●	●	●	●
		●	●	●	●
		-	-	-	-

ISO catalogue number
WNMG060408RN
WNMG060412RN
WNMG080408RN
WNMG080412RN
WNMG080416RN

D	L10	R _E
9,53	6,52	0,8
9,53	6,52	1,2
12,70	8,69	0,8
12,70	8,69	1,2
12,70	8,69	1,6



Screw-On • CCMT Insert • Positive • FP





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
CCMT060204FP	6,35	6,45	0,4	-	●	●	-
CCMT060208FP	6,35	6,45	0,8	-	●	●	-
CCMT09T302FP	9,53	9,67	0,2	-	-	●	-
CCMT09T304FP	9,53	9,67	0,4	-	-	●	-
CCMT09T308FP	9,53	9,67	0,8	-	●	●	-
CCMT120404FP	12,70	12,90	0,4	-	●	●	-
CCMT120408FP	12,70	12,90	0,8	-	●	●	-

Screw-On • CCMT Insert • Positive • MF





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
CCMT060204MF	6,35	6,45	0,4	-	●	●	-
CCMT060208MF	6,35	6,45	0,8	-	●	●	-
CCMT09T304MF	9,53	9,67	0,4	-	-	●	-
CCMT09T308MF	9,53	9,67	0,8	-	●	●	-
CCMT09T312MF	9,53	9,67	1,2	-	●	●	-
CCMT120408MF	12,70	12,90	0,8	-	●	●	-
CCMT120412MF	12,70	12,90	1,2	-	●	●	-

Screw-On • DCMT Insert • Positive • FP



● first choice



○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
DCMT070202FP	6,35	7,75	0,2	-	-	●	-
DCMT070204FP	6,35	7,75	0,4	-	-	●	-
DCMT070208FP	6,35	7,75	0,8	-	-	●	-
DCMT11T302FP	9,53	11,63	0,2	-	●	●	-
DCMT11T304FP	9,53	11,63	0,4	-	●	●	-
DCMT11T308FP	9,53	11,63	0,8	-	●	●	-

29	30	8-10	5

Screw-On • DCMT Insert • Positive • MF





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
DCMT11T304MF	9,53	11,63	0,4	-	●	●	-
DCMT11T308MF	9,53	11,63	0,8	-	●	●	-
DCMT11T312MF	9,53	11,63	1,2	-	●	●	-

Screw-On • SCMT Insert • Positive • FP





● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
SCMT09T304FP	9,53	9,53	0,4	-	-	●	-
SCMT09T308FP	9,53	9,53	0,8	-	-	●	-
SCMT120404FP	12,70	12,70	0,4	-	-	●	-
SCMT120408FP	12,70	12,70	0,8	-	-	●	-

Screw-On • SCMT Insert • Positive • MF



● first choice


○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	○	○	○	○
H	○	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
SCMT09T308MF	9,53	9,53	0,8	-	●	●	-
SCMT09T312MF	9,53	9,53	1,2	-	●	●	-
SCMT120404MF	12,70	12,70	0,4	-	-	●	-
SCMT120408MF	12,70	12,70	0,8	-	-	●	-
SCMT120412MF	12,70	12,70	1,2	-	-	●	-

29	30	8-10	5

Screw-On • TCMT Insert • Positive • FP

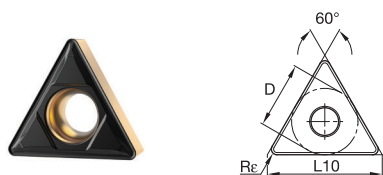


● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
TCMT090204FP	5,56	9,62	0,4	-	-	●	-
TCMT110204FP	6,35	11,00	0,4	-	-	●	-
TCMT110304FP	6,35	11,00	0,4	-	●	-	-
TCMT110208FP	6,35	11,00	0,8	-	-	●	-
TCMT16T304FP	9,53	16,50	0,4	-	-	●	-
TCMT16T308FP	9,53	16,50	0,8	-	-	●	-

Screw-On • TCMT Insert • Positive • MF

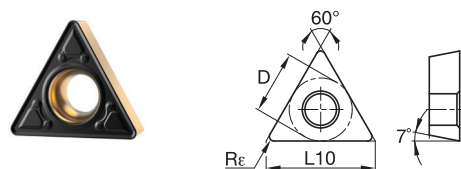


● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
TCMT110204MF	6,35	11,00	0,4	-	-	●	-
TCMT110208MF	6,35	11,00	0,8	-	-	●	-
TCMT16T308MF	9,53	16,50	0,8	-	-	●	-
TCMT16T312MF	9,53	16,50	1,2	-	-	●	-

Screw-On • VBMT Insert • Positive • FP

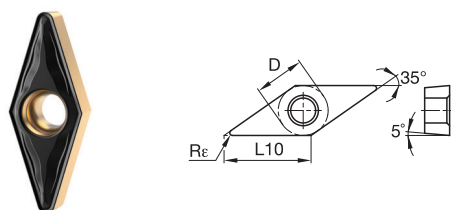

● first choice

○ alternate choice

P	●	●	●	●
M	●	●	●	○
K	●	○	○	○
N	●	○	○	○
S	●	○	○	○
H	●	○	○	○

ISO catalogue number	D	L10	Rε	KCPK05	KCP10B	KCP25C	KCP40B
VBMT160404FP	9,53	16,61	0,4	-	-	●	-
VBMT160408FP	9,53	16,61	0,8	-	●	●	-
VBMT160412FP	9,53	16,61	1,2	-	●	●	-

29	30	8-10	5


Turning

NEW!**KENGold™** | The Gold Standard in Coating Technology


wear resistance ← → toughness

Coating	Grade Description		05	10	15	20	25	30	35	40	45
KCP25C		Composition: A tough cobalt-enriched carbide grade with a newly designed advanced multilayer MTCVD TiCN-Al ₂ O ₃ coating with a gold TiN outer layer on the flank. Application: Primarily the best general-purpose turning grade for steels and ferritic/martensitic stainless steels with alternate capability in heavy cast iron roughing. The substrate design provides an excellent combination of deformation resistance and insert edge strength. Coating layers offer superior wear resistance, enabling increased speeds and productivity. A targeted post-coat treatment minimizes microchipping and enables improved part finishes while retaining the bright gold color on the flank so that used/unused cutting edges can clearly be identified.	P								

wear resistance ← → toughness

Grades	Coating	Grade Description		05	10	15	20	25	30	35	40	45
KCPK05		Composition: A deformation-resistant, cobalt-enriched substrate combined with a thick MTCVD TiCN-Al ₂ O ₃ coating. Application: Primarily for high-productivity turning of steels in continuous to lightly interrupted cuts. Its unique combination of substrate and coating also makes it an alternate choice as a roughing grade for cast iron where chipping resistance is required. This grade provides an excellent combination of deformation resistance and high-speed capability, allowing the fastest steel part production.	P									
			K									
KCP10B		Composition: A specially engineered wear-resistant cobalt-enriched carbide grade with a multilayer MTCVD TiCN-Al ₂ O ₃ -TiOCN coating with superior interlayer adhesion. Application: Primarily an excellent finishing to medium machining grade for steels, ferritic, and martensitic steels. Alternatively it can also be used for heavy roughing of cast irons. The cobalt-enriched substrate offers a balanced combination of deformation resistance and edge toughness, while the smooth thick coating adds outstanding abrasion and crater wear resistance for high-speed machining with excellent surface finishes.	P									
			K									
KCP40B		Composition: A very tough cobalt-enriched carbide grade with a thin multilayer MTCVD TiCN-Al ₂ O ₃ -TiOCN coating. Application: Primarily for heavy roughing of carbon steels, alloy steels, and ferritic/martensitic stainless steels. It is also an alternative choice for roughing of austenitic and duplex stainless steels. The strong substrate and thin coating combination provides superior toughness and operational security, allowing high feeds and depths of cut for increased metal removal rates even in demanding interrupted cuts.	P									
			M									

Key to Product Table Column Headings



You may notice a slight change in the appearance of our product tables and specification charts. In this catalog, Kennametal introduces a set of short-name codes to improve the readability of tables and drawings. These codes replace full-text descriptions. The full list of codes and their definitions can be found below.

Short-Name Code	Full Text Description
D	Insert: Insert IC Size
L10	Insert Cutting Edge Length
R _c	Corner Radius

P Steel	N Non-Ferrous	H Hardened Materials
M Stainless Steel	S High-Temp Alloys	C CFRP Materials
K Cast Iron		

material group	description	content	tensile strength RM (MPa)*	hardness (HB)	hardness (HRC)	material number
P0	Low-Carbon Steels, Long Chipping	C <0,25%	<530	<125	–	–
P1	Low-Carbon Steels, Short Chipping, Free Machining	C <0,25%	<530	<125	–	C15, Ck22, ST37-2, S235JR, 9SMnPb28, GS38
P2	Medium- and High-Carbon Steels	C >0,25%	>530	<220	<25	ST52, S355JR, C35, GS60, Cf53
P3	Alloy Steels and Tool Steels	C >0,25%	600–850	<330	<35	16MnCr5, Ck45, 21CrMoV5-7, 38SMn28
P4	Alloy Steels and Tool Steels	C >0,25%	850–1400	340–450	35–48	100Cr6, 30CrNiMo8, 42CrMo4, C70W2, S6525, X120Mn12
P5	Ferritic, Martensitic, and PH Stainless Steels	–	600–900	<330	<35	100Cr6, 30CrNiMo8, 42CrMo4, C70W2, S6525, X120Mn12
P6	High-Strength Ferritic, Martensitic, and PH Stainless Steels	–	900–1350	350–450	35–48	X102CrMo17, G-X120Cr29
M1	Austenitic Stainless Steel	–	<600	130–200	–	X5CrNi 18 10, X2CrNiMo 17 13 2, G-X25CrNiSi18 9, X15CrNiSi 20 12
M2	High-Strength Austenitic Stainless and Cast Stainless Steels	–	600–800	150–230	<25	X2CrNiMo 13 4, X5NiCr 32 21, X5CrNiNb 18 10, G-X15CrNi 25-20
M3	Duplex Stainless Steel	–	<800	135–275	<30	X8CrNiMo27 5, X2CrNiMoN22 5 3, X20CrNiSi25 4, G-X40CrNiSi27 4
K1	Grey Cast Iron	–	125–500	120–290	<32	GG15, GG25, GG30, GG40, GTW40
K2	Low- and Medium-Strength Ductile Irons (Nodular Irons) and Compacted Graphite Irons (CGI)	–	<600	130–260	<28	GGG40, GTS35
K3	High-Strength Ductile Irons and Austempered Ductile Iron (ADI)	–	>600	180–350	<43	GGG60, GTW55, GTS65
N1	Wrought Aluminum	–	–	–	–	AlMg1, Al99.5, AlCuMg1, AlCuBiPb, AlMgSi1, ALMgSiPb
N2	Low-Silicon Aluminum Alloys and Magnesium Alloys	Si <12,2%	–	–	–	GAISiCu4, GDAISi10Mg
N3	High-Silicon Aluminum Alloys and Magnesium Alloys	Si >12,2%	–	–	–	G-ALSi12, G-AISi17Cu4, G-AISi21CuNiMg
N4	Copper-, Brass-, Zinc-Based on Machinability Index Range of 70–100	–	–	–	–	CuZn40, Ms60, G-CuSn5ZnPb, CuZn37, CuSi3Mn
N5	Nylon, Plastics, Rubbers, Phenolics, Resins, Fiberglass	–	–	–	–	LEXAN®, HOSTALEN®, POLYSTYROL®, MAKROLON®
N6	Carbon, Graphite Composites, CFRP	–	–	–	–	CFK, GFK
N7	Metal Matrix Composites (MMC)	–	–	–	–	–
S1	Iron-Based, Heat-Resistant Alloys	–	500–1200	160–260	25–48	X1NiCrMoCu32 28 7, X12NiCrSi36 16, X5NiCrAlTi31 20, X40CoCrNi20 20
S2	Cobalt-Based, Heat-Resistant Alloys	–	1000–1450	250–450	25–48	Haynes® 188, Stellite™ 6,21,31
S3	Nickel-Based, Heat-Resistant Alloys	–	600–1700	160–450	<48	INCONEL® 690, INCONEL 625, Hastelloy®, NIMONIC® 75
S4	Titanium and Titanium Alloys	–	900–1600	300–400	33–48	Ti1, TiAl5Sn2, TiAl6V4, TiAl4Mo4Sn2
H1	Hardened Materials	–	–	–	44–48	GX260NiCr42, GX330NiCr42, GX300CrNiSi952, GX300CrMo153, Hardox® 400
H2	Hardened Materials	–	–	–	48–55	–
H3	Hardened Materials	–	–	–	56–60	–
H4	Hardened Materials	–	–	–	>60	–
C1	CFRP, CFRP/CFRP	–	–	–	–	–
C2	CFRP/Non-Ferrous	–	–	–	–	–
C3	CFRP/High-Temp	–	–	–	–	–
C4	CFRP/Stainless Steel	–	–	–	–	–
C5	CFRP/Non-Ferrous/High-Temp	–	–	–	–	–

[illegible]

METALCUTTING SAFETY

IMPORTANT SAFETY INSTRUCTIONS

Read before using the tools in this catalog!

Projectile and Fragmentation Hazards:

Modern metalcutting operations involve high spindle and cutter speeds and high temperatures and cutting forces. Hot metal chips may fly off the workpiece during metalcutting. Although cutting tools are designed and manufactured to withstand high cutting forces and temperatures, they can sometimes fragment, particularly if they are subjected to over-stress, severe impact, or other abuse.

To avoid injury:

- Always wear appropriate personal protective equipment, including safety goggles, when operating metalcutting machines or working nearby.
- Always make sure all machine guards are in place.

Breathing and Skin Contact Hazards:

Grinding carbide or other advanced cutting tool materials produces dust or mist containing metallic particles. Breathing this dust or mist — especially over an extended period — can cause temporary or permanent lung disease or make existing medical conditions worse. Contact with this dust or mist can irritate eyes, skin, and mucous membranes and may make existing skin conditions worse.

To avoid injury:

- Always wear breathing protection and safety goggles when grinding.
- Provide ventilation control and collect and properly dispose of dust, mist, or sludge from grinding.
- Avoid skin contact with dust or mist.

For more information, read the applicable Material Safety Data Sheet provided by Kennametal and consult General Industry Safety and Health Regulations, Part 1910, Title 29 of the Code of Federal Regulations.

These safety instructions are general guidelines. Many variables affect machining operations. It is impossible to cover every specific situation. The technical information included in this catalog and recommendations on machining practices may not apply to your particular operation. For more information, consult the Kennametal Metalcutting Safety booklet, available free from Kennametal at 724 539 5747 or fax 724 539 5439. For specific product safety and environmental questions, contact our Corporate Environmental Health and Safety Office at 724 539 5066 or fax 724 539 5372.

Kennametal, the stylized K, Beyond Drive, KENGGold, Kenloc, NOVO, and Stellite are trademarks of Kennametal, Inc. and are used as such herein. The absence of a product, service name, or logo from this list does not constitute a waiver of the Kennametal trademark or other intellectual property rights concerning that name or logo.

Android™ is a trademark of Google LLC.

App Store® is a registered trademark of Apple Inc., registered in the U.S. and other countries.

Astroloy™ is a trademark of Svedala Industries, Inc. Corporation.

Discaloy™ is a trademark of Westinghouse Electric Corporation.

Google Play™ is a trademark of Google LLC.

Hardox® is a registered trademark of SSAB Technology AB Corporation.

Hastelloy® and Haynes® are registered trademarks of Haynes International, Inc. Corporation.

HOSTALEN™ is a trademark of Hoechst GmbH Corporation.

INCOLOY®, INCONEL®, MONEL®, NIMONIC®, and UDIMET® are registered trademarks of Special Metals Corporation.

INVAR® is a registered trademark of Inphy Alloys Joint Stock Company.

LEXAN® is a registered trademark of Sabic Innovative Plastics IP B.V. Company.

MAKROLON® is a registered trademark of Covestro Deutschland AG.

POLYSTYROL® is a registered trademark of BASF SE.

Waspaloy® is a registered trademark of United Technologies Corporation.

©2023 Kennametal Inc. All rights reserved.



INNOVATIONS

WORLD HEADQUARTERS

Kennametal Inc.

525 William Penn Place | Suite 3300
Pittsburgh, PA 15219 USA
Tel: 1 800 446 7738
ftmill.service@kennametal.com

EUROPEAN HEADQUARTERS

Kennametal Europe GmbH

Rheingoldstrasse 50
CH 8212 Neuhausen am Rheinfall
Switzerland
Tel: +41 52 6750 100
neuhausen.info@kennametal.com

ASIA-PACIFIC HEADQUARTERS

Kennametal Singapore Pte. Ltd.

3A International Business Park
Unit #01-02/03/05, ICON@IBP
Singapore 609935
Tel: +65 6265 9222
k-sg.sales@kennametal.com

INDIA HEADQUARTERS

Kennametal India Limited

CIN: L27109KA1964PLC001546
8/9th Mile, Tumkur Road
Bangalore - 560073
Tel: +91 080 22198444 or +91 080 43281444
bangalore.information@kennametal.com



kennametal.com